



ALAPONT
GLOBAL


Loading docks

SLIDING STEEL LOADING BRIDGES

Steel walkways are used to manually bridge the height difference between the warehouse and the truck.

Installation is simple; they are fixed to the building's dock or, if available, to the platform. They require no electricity and can be fixed or mobile.

- Require no electricity, making them ideal for warehouses without lighting.
- Can be fixed or laterally sliding, allowing lateral movement to optimize their use.

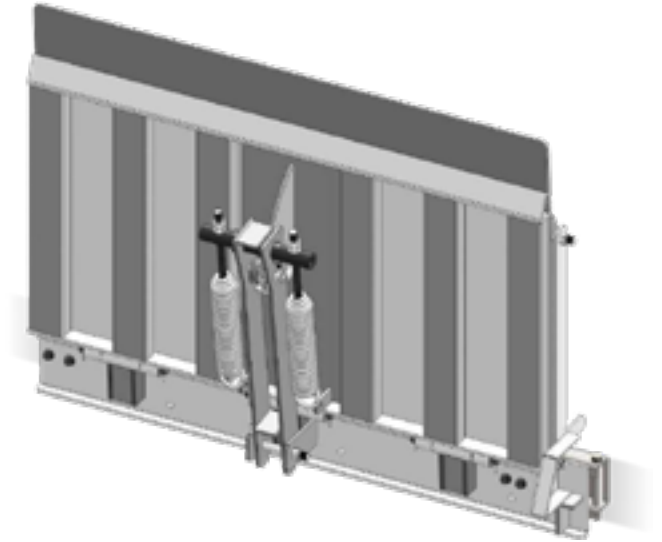

TECHNICAL FEATURES



✓ **Platform leveling is balanced** by alloy steel tension springs. **The perfect balance of strength and elasticity** completely counteracts the platform's weight, allowing effortless maneuverability for the operator during leveling.

✓ **A locking wait position for increased safety** and ease of handling, which prevents accidental collisions during vehicle backing and approach.


✓ Platform equipped with a **non-slip safety surface** for transport maneuverability and reinforced with cold-rolled profiles on its underside.

✓ **Low-friction articulation** requiring no maintenance, insensitive to dirt and foreign bodies.

✓ **Crosswise guidance on an endless track** (sliding type) formed by 2 vertical support radial bearings plus 2 tandem rollers to counteract the turning moment. This allows easy sliding along the track when unloaded and also absorbs harmful forces and impacts to the guide rail, thus preserving its straightness.




DIMENSIONS

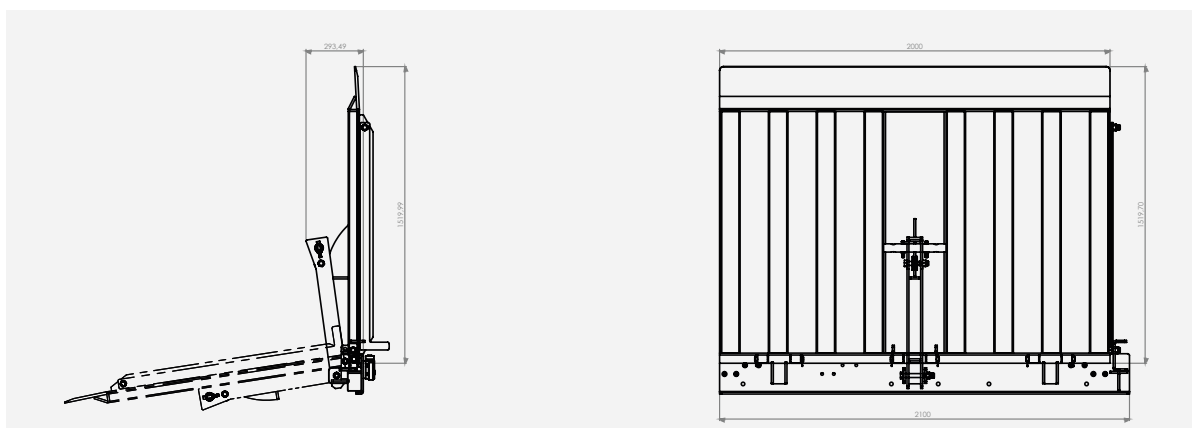

REF.	Dimensions (mm)	H1	H2	Max. load (kg)
3001B0101000	1.500 x 1.000	21 cm	14 cm	4.000
3001B0102000	1.500 X 1.200	25 cm	18 cm	4.000
3001B0103000	1.500 x 1.500	30 cm	23 cm	4.000
3001B0104000	2.000 x 1.000	21 cm	14 cm	4.000
3001B0105000	2.000 x 1.200	25 cm	18 cm	4.000
3001B0106000	2.000 x 1.500	30 cm	23 cm	4.000

* Use limited to hand pallet trucks or powered pallet trucks. Do not use with forklift trucks.

BASIC INSTALLATION REQUIREMENTS

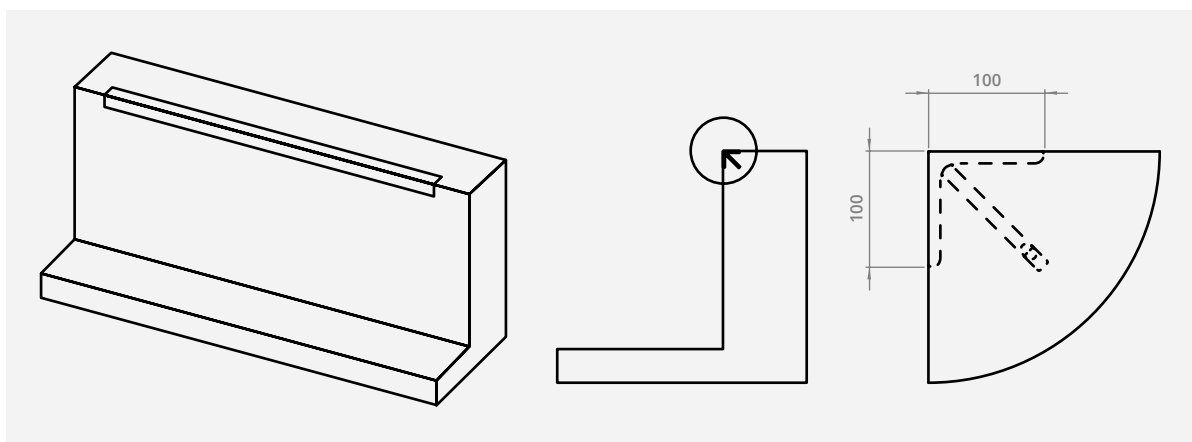

- It is essential for installation to place a metal angle (100x100x10 mm) at the edge of the concrete to weld the base of the walkway to it.
- The width of the angle must be at least equal to the width of the walkway being installed.

FINISHES

STANDARD OPTION

- Colour:



Black