



ALAPONT
GLOBAL

Accessories for loading docks


RUBBER BUMP STOP

The Alapont Global **rubber bump** stop offers high durability and **is the classic, most commonly used** stop for basic standard installations.

- Anti-corrosive, cold-galvanized finish (RAL 9005).
- Ready for welding or bolting (hardware included).
- High weather resistance
- Good elasticity
- High tear resistance
- High abrasion resistance
- Excellent durability



TECHNICAL FEATURES

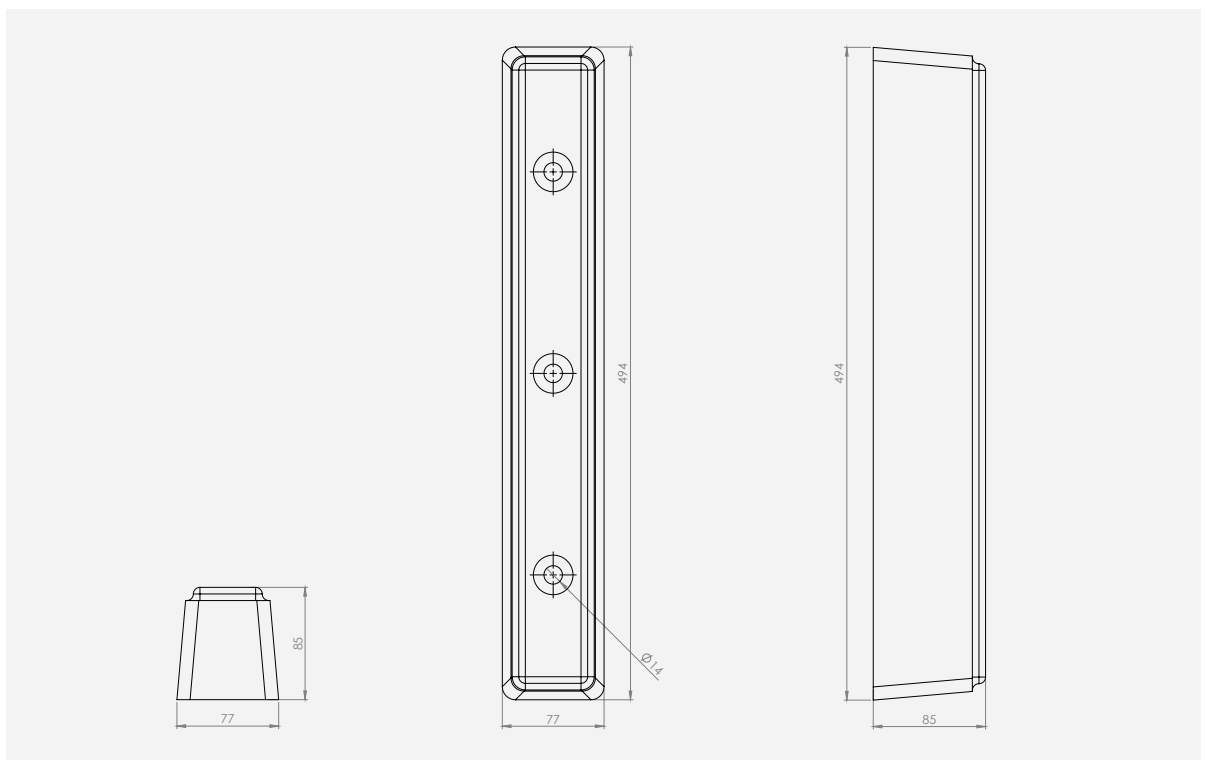

REFERENCE	DIMENSIONS	DIM. AXES	DISTANCE BETWEEN AXES
0101A0101027	500 x 80 x 80 mm	14 mm	152 mm

SURFACES

- Clean and free from burrs.
- Silicone-free.

MAINTENANCE

Due to the composition of the material used, we indicate that virtually no maintenance or repair is required.

MATERIALS

MATERIAL	Rubber: Recycled from tyres and other recycled compounds.
COLOR	Black Ral 9005
HARDNESS	DIN 53505 85 ° ± 10. Shore A
REBOUND RESILIENCE	DIN 53512 ≥ 25%
MECHANICAL STRENGTH	DIN 53504 ≥ 14 N/mm ²
ELONGATION AT BREAK	DIN 53504 ≥ 225%
TEAR RESISTANCE	DIN 53515 ≥ 10.0 N/mm, test specimen A
COMPRESSION SET	DIN 53517 ≤ 15% after 22 h at 70°C and 25% pre-strain
HARDNESS VARIATION	± 10 ° Shore A
MECHANICAL STRENGTH VARIATION	± 10%
ELONGATION AT BREAK VARIATION	- 50%
FIXING	Screw fixing
AREA OF USE	Indoors and outdoors
INCLUDING SCREWS	✓
RESISTANT TO..	
UV RAYS	✓
ACIDS	✓
DETERGENTS	✓